




Richardson-Wilcox

Sectional Overhead Doors

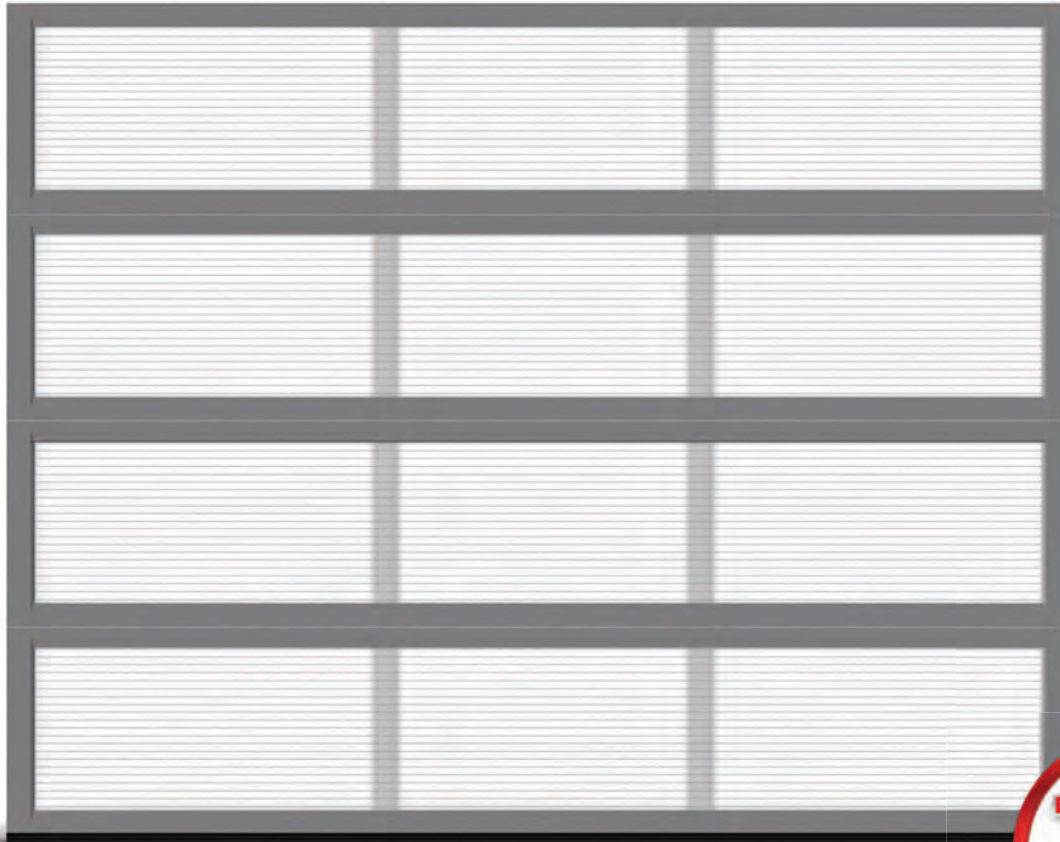


POLYTITE Sectional Polycarbonate Doors

P175, P175T

- Panels made with 5/8" (16mm) thick, triple-walled polycarbonate sheet are lightweight, providing easy operation with minimum stress on hardware components.
- Translucent polycarbonate panels provide a naturally-lit, inviting work environment and help reduce winter heating costs through the effects of solar heat gain.
- Polykite doors are extremely impact-resistant and can withstand long-term exposure to extreme elements such as sun, wind, rain and snow without cracking or splitting.
- Particularly suited for service garages but ideal for all types of industrial, agricultural, commercial, institutional and residential overhead door installations where an attractive, light-transmitting, strong, lightweight door is desired.
- P175T comes standard with insulated Thermatite kick panel section fabricated from pre-painted, hot dipped galvanized steel sheets with rigid polyurethane insulation core, face sheet stucco embossed and rib reinforced.



PRODUCT SPECIFICATIONS

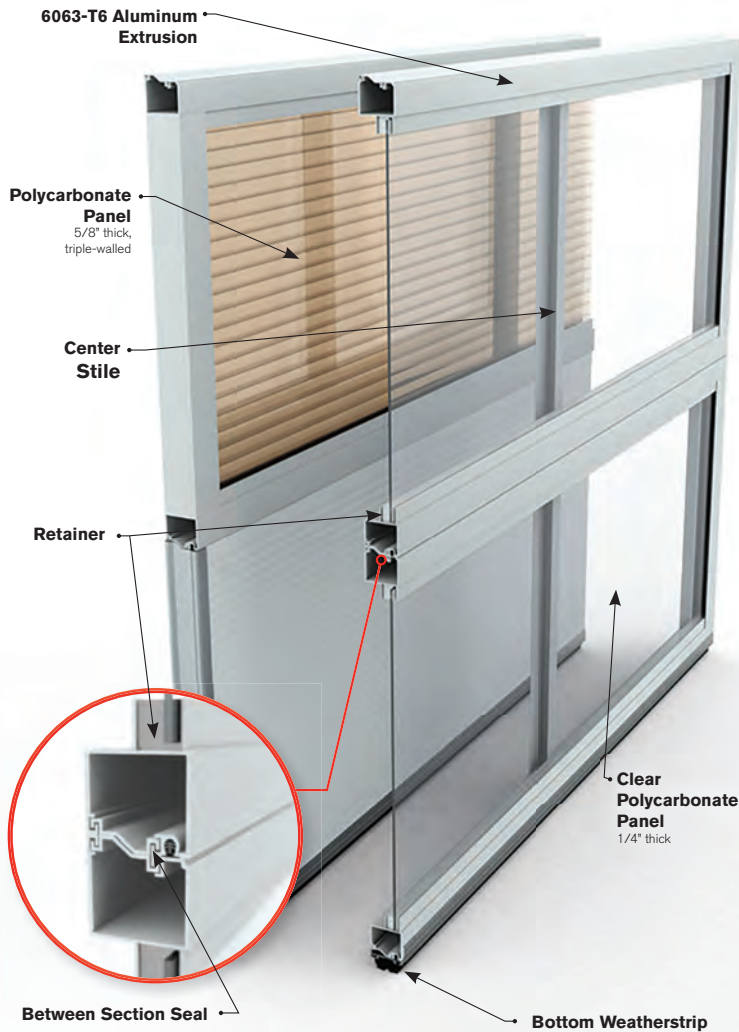

SECTION DETAILS

SECTION THICKNESS: 1 3/4" (45mm)
SECTION HEIGHT: 21" & 24" (533mm & 610mm)

OPENING WIDTHS
Basic Windload: 8'-0" – 16'-2" (2438mm – 4877mm)
15 psf Design: 8'-0" – 24'-2" (2438mm – 7366mm)
Custom Door Width: Up to 30'-2" (9195mm)

POLYCARBONATE PANELING

The external side of the Polycarbonate is protected with a coextruded layer warranting resistance to atmospheric agents and U.V. rays.

Thickness: 5/8" (16mm)
Structure: Triple-walled
Weight: 0.553lbs/sq ft (2.69 kg/sq m)
R-Factor: 2.500 ft² hF/Btu
U-Factor: 2.271 W/m²K

Fire Reaction: ASTM E84-01 Flame spread and smoke Developed: Class A.

Solar Heat Gain Coefficient: Clear: 75%
Light Transmission: Clear: 74%

Standard Colors: Clear, Dark Bronze, Western Bronze
Optional Colors: Green, Blue, White, Opaque White (available upon request)

STILES AND RAILS

Fabricated from 6063-T6 aluminum alloy extrusions, extrusion thickness 0.063" (1.6mm) thick, and 0.090" (2.18mm) thick at hardware mounting locations.

End Stiles: 2 1/2" (64mm) wide aluminum; Double end stiles for doors over 16'-2" (4928mm) wide
Center Stiles: 3" (76mm) wide aluminum
Pair of Meeting Rails: 4 1/2" (114mm) high aluminum
Top Rail: 2 3/16" (56mm) high aluminum
Bottom Rail: 2 9/16" (65mm) high aluminum

Standard Colors: Clear Anodized and White Painted

Reinforcement as required by windload

0.090" (2.18mm) thick aluminum extrusion for hardware mounting. Full width integral horizontal, reinforcement truss at meeting rails as required. Galvanized steel truss as required.

Optional Thermatite Multi-Ribbed (MR) Bottom Section - (P175T)

Insulated sections fabricated from pre-painted, hot dipped galvanized, steel sheet; with rigid polyurethane insulation core, CFC and HCFC free, face sheet stucco embossed and rib reinforced.

For structural integrity, all doors 20'-0" and wider, the Thermatite Multi-Ribbed Bottom Section is standard.

Doors less than 20'-0" wide the Thermatite Multi-Ribbed Bottom Section is optional.

R-Factor: 16.000 ft² hF/Btu
U-Factor: 0.355 W/m²K

Standard Colours: White, Silver

Optional Accessories for Thermatite Section:

- Exhaust port: 3" (75mm) / 4" (102mm) / 5" (127mm) / 6" (152mm)

SECTION & STILE SCHEDULE

DOOR OPENING HEIGHT	Sections High	DOOR WIDTH	# of Stiles
7'-1" to 8'-1" (2159mm to 2464mm)	4	Up to 9'-2" (2794mm)	1
8'-2" to 10'-1" (2489mm to 3073mm)	5	9'-3" to 12'-2" (2819mm to 3708mm)	2
10'-2" to 12'-1" (3099mm to 3683mm)	6	12'-3" to 16'-2" (3734mm to 4928mm)	3
12'-2" to 14'-1" (3708mm to 4293mm)	7	16'-3" to 19'-2" (4953mm to 5842mm)	4
14'-2" to 16'-1" (4318mm to 4902mm)	8	19'-3" to 24'-2" (5867mm to 7366mm)	5
16'-2" to 18'-1" (4928mm to 5512mm)	9		

WARRANTY

Polytite Panels: 10 years against breakage, excessive yellowing and loss of light transmission

Materials and workmanship: 1 year



5100 Timberlea Boulevard,
 Mississauga, Ontario Canada L4W 2S5

www.rwdoors.com
 1 (800) 667-1572

Professionally installed and serviced by:

Door Tech, LLC
 5768 E. Gershmel Loop
 Palmer, Alaska 99645
 Phone: 907.746.3900
 www.DoorTechAlaska.com