

Richards-Wilcox[®] THERMATITETM




T175-MR & T175 OVERHEAD SECTIONAL **INSULATED STEEL DOORS**

- Fabricated from pre-painted, hot dipped stucco embossed galvanized steel.



 Insulated with 1.75" of Neufoam[™] polyurethane insulation. CFC and HCFC free.





Multi-Ribbed



Unique Multi-Ribbed (MR) Profile


- Multi-Ribbed profile complements contemporary architecture.
- Perfect choice when aesthetics are a key consideration.
- Non-repeating stucco surface texture resists scratches and dirt.

Ribbed Profile

- Recognized as a standard look on many door systems that are already installed.
- RW can provide matching section replacement options to customers quickly and efficiently.

Ribbed

PRODUCT SPECIFICATIONS

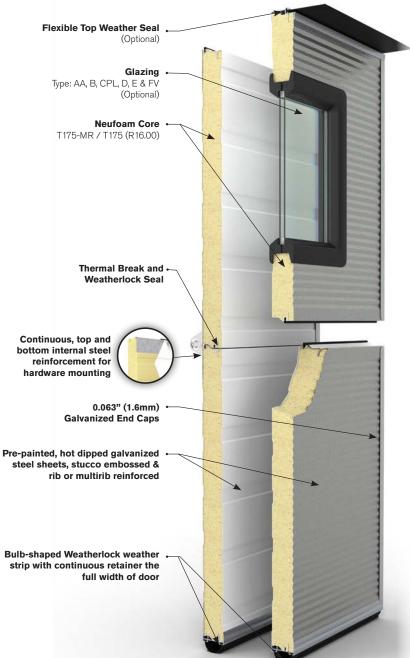

SECTION SCHEDULE

Garage Doors

DOOR OPENING HEIGHT	Sections High	DOOR OPENING WIDTH	Max no. of Windows
7'-1" to 8'-1" (2159mm to 2464mm)	4	8'-0" to 9'-2" (2438mm to 2794mm)	2
8'-2" to 10'-1" (2489mm to 3073mm)	5	9'-3" to 12'-2" (2819mm to 3708mm)	3
10'-2" to 12'-1" (3099mm to 3683mm)	6	12'-3" to 16'-2" (3734mm to 4928mm)	4
12'-2" to 14'-1" (3708mm to 4293mm)	7	16'-3" to 19'-2" (4953mm to 5842mm)	5
14'-2" to 16'-1" (4318mm to 4902mm)	8	19'-3" to 24'-2" (5867mm to 7366mm)	6
16'-2" to 18'-1" (4928mm to 5512mm)	9	24'-3" to 28'-2" (7391mm to 8585mm)	7

SECTION DETAILS

SECTION THICKNESS 1 3/4" (45mm)

THERMAL VALUE OF SECTIONS' R 16 ft² hF/Btu

FACE SHEET PROFILE Multi-Ribbed / Ribbed

EXTERIOR FACE SHEET THICKNESS 0.019" (0.48mm)


MAXIMUM OPENING WIDTH^{**} 36'-2" (11024mm)

MAXIMUM OPENING HEIGHT 22' (6706mm)

FINISH Two coat, baked-on paint system on exterior side, primer and polyester finish coat.



GLAZING OPTIONS



WARRANTY

10 years against delamination of the panels 1 year on materials and workmanship

*Thermal Values Calculated. **For larger sizes, please consult factory.



ichards-Wilcox 1-800-667-1572 www.rwdoors.com

